

PW-C32 PW-C33

**BUILT TO PERFORM.
DESIGNED TO FIT.**



IPC

BY TENNANT COMPANY

The **PW-C32** and **PW-C33** are cold water high-pressure washers developed with a compact structure and features intended to support cleaning operations.

Developed for use in outdoor environments, these machines feature a design focused on functionality and structural integrity.

Models are available with pressure levels **up to 160 bar** and water flow rates **of 540 l/h.**



KEY BENEFITS




COMPACT STRUCTURE

Designed with a vertical layout and reduced footprint for use in different operational settings.



EVERYTHING IN PLACE, ALWAYS READY

Hose reel, cable holder, and built-in accessory storage help maintain organization



CONFIGURED FOR MULTIPLE USES

Supplied with accessories designed for operation on various surfaces and equipment.



PROTECTIVE COMPONENT FEATURE

The integrated filters are designed to assist in managing debris during regular operation.

FIND YOUR FIT

The PW-C32 and PW-C33 are built to suit different cleaning demands and working environments. Compare models to find the ideal combination of power, flow rate, and features that match your specific needs.



	PW-C32 1207 A	PW-C32 1307 A
PRESSURE	120 bar	130 bar
POWER	1800 W	2100 W
FLOW RATE	400 l/h	420 l/h
PUMP TYPE	Axial	Axial
PUMP HEAD MATERIAL	Aluminium	Aluminium



	PW-C33 1508 A	PW-C33 1508 A0	PW-C33 1609 A0
PRESSURE	150 bar	150 bar	160 bar
POWER	2500 W	2500 W	3200 W
FLOW RATE	500 l/h	500 l/h	540 l/h
PUMP TYPE	Axial	Axial	Axial
PUMP HEAD MATERIAL	Aluminium	Brass	Brass



FOCUSED DESIGN COMPONENTS

	PW-C32	PW-C33
PUMP-MOTOR ASSEMBLY		
AIR-COOLED 2-POLE INDUCTION MOTOR	•	•
AXIAL PUMP	•	•
ALUMINIUM PUMP HEAD	•	•
BRASS PUMP HEAD (IN SELECT MODELS)		•
AUTOMATIC START/STOP SYSTEM	•	•
VERTICAL LAYOUT DESIGNED FOR CONVENIENT OPERATION		
TELESCOPIC HANDLE WITH BUTTON FOLD-DOWN	•	•
UPRIGHT DESIGN	•	•
TWO LARGE WHEELS FOR SMOOTH MOVEMENT ACROSS OUTDOOR SURFACES	•	•
5-METRE POWER CABLE	•	•
INTEGRATED STORAGE FEATURES FOR ACCESSORIES AND COMPONENTS		
HOSE REEL WITH FOLDABLE HANDLE	•	•
INTEGRATED CABLE HOLDER	•	•
BUILT-IN HOLDERS FOR NOZZLES AND ACCESSORIES	•	•
DETERGENT TAP		•
STANDARD EQUIPMENT		
COMPLETE ACCESSORY SET: 6 NOZZLES (0°, 15°, 25°, 40°, CHEM NOZZLE, TURBO NOZZLE)	•	•
REINFORCED 8-METER LENGTHS HOSE, STAINLESS STEEL LANCE AND M22 BRASS COUPLINGS	•	
REINFORCED 10-METER LENGTHS HOSE, STAINLESS STEEL LANCE AND M22 BRASS COUPLINGS		•
BUILT-IN 1,2 LITER CHEMICAL TANK AND FOAMER	•	•
PROTECTIVE FILTERING SYSTEM		
FINE WATER FILTER PROTECTS THE PUMP FROM DIRT AND DEBRIS	•	•
WAND INLET FILTER SHIELDS INTERNAL MECHANISMS	•	•

FOCUSED DESIGN COMPONENTS



HOSE REEL
with foldable handle



**INTEGRATED CABLE
HOLDER**



DETERGENT TAP



QUICK-CONNECT FITTINGS
for fast attachment





UPRIGHT DESIGN



BUILT-IN HOLDERS
for nozzles and accessories



TELESCOPIC HANDLE




**BUILT-IN 1,2 LITER
CHEMICAL TANK AND
HIGH-PRESSURE FOAMER**




TWO LARGE WHEELS

EQUIPPED FOR OUTDOOR CLEANING

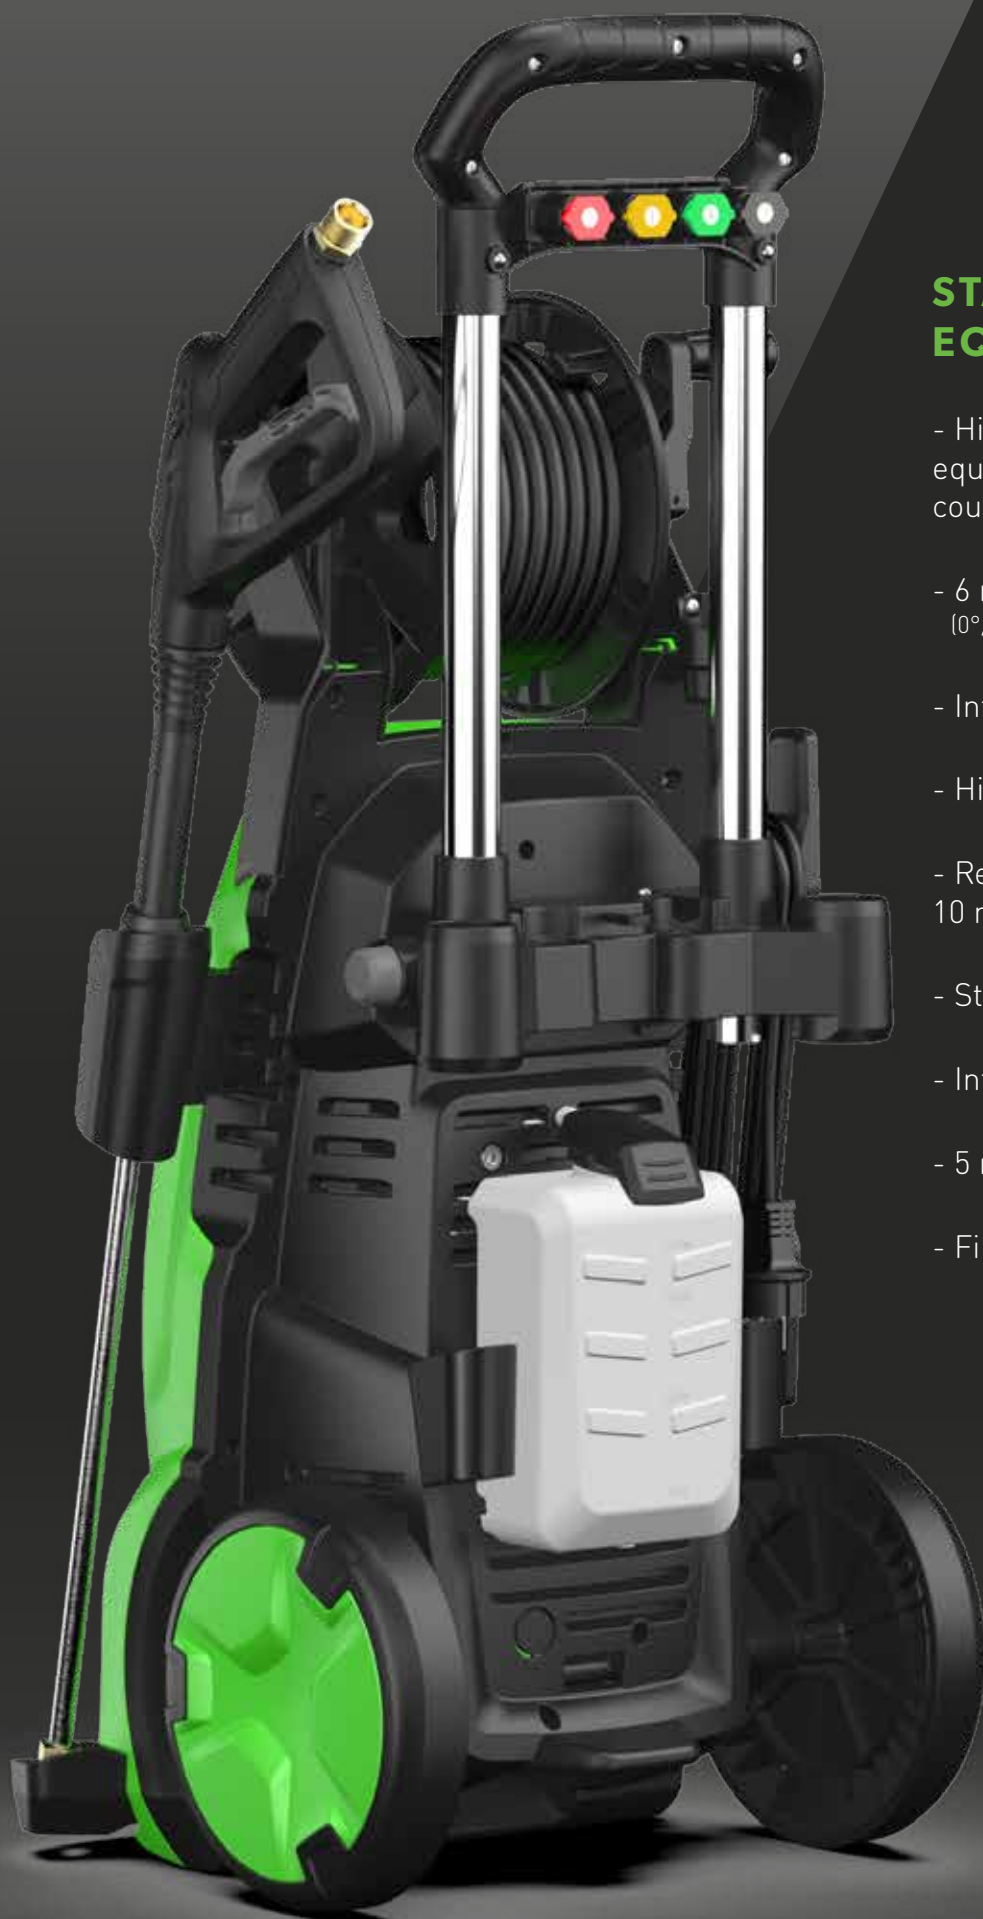

STANDARD EQUIPMENT

- High-pressure wand: equipped with M22 brass couplings and inlet filter
- 6 nozzles (0°, 15°, 25°, 40°, chem nozzle, turbo nozzle)
- Integrated chemical tank
- High-pressure foamer
- Reinforced hose available in 8 to 10 m lengths, depending on model.
- Stainless steel lance
- Integrated cable holder
- 5 metre power cable
- Fine water filter

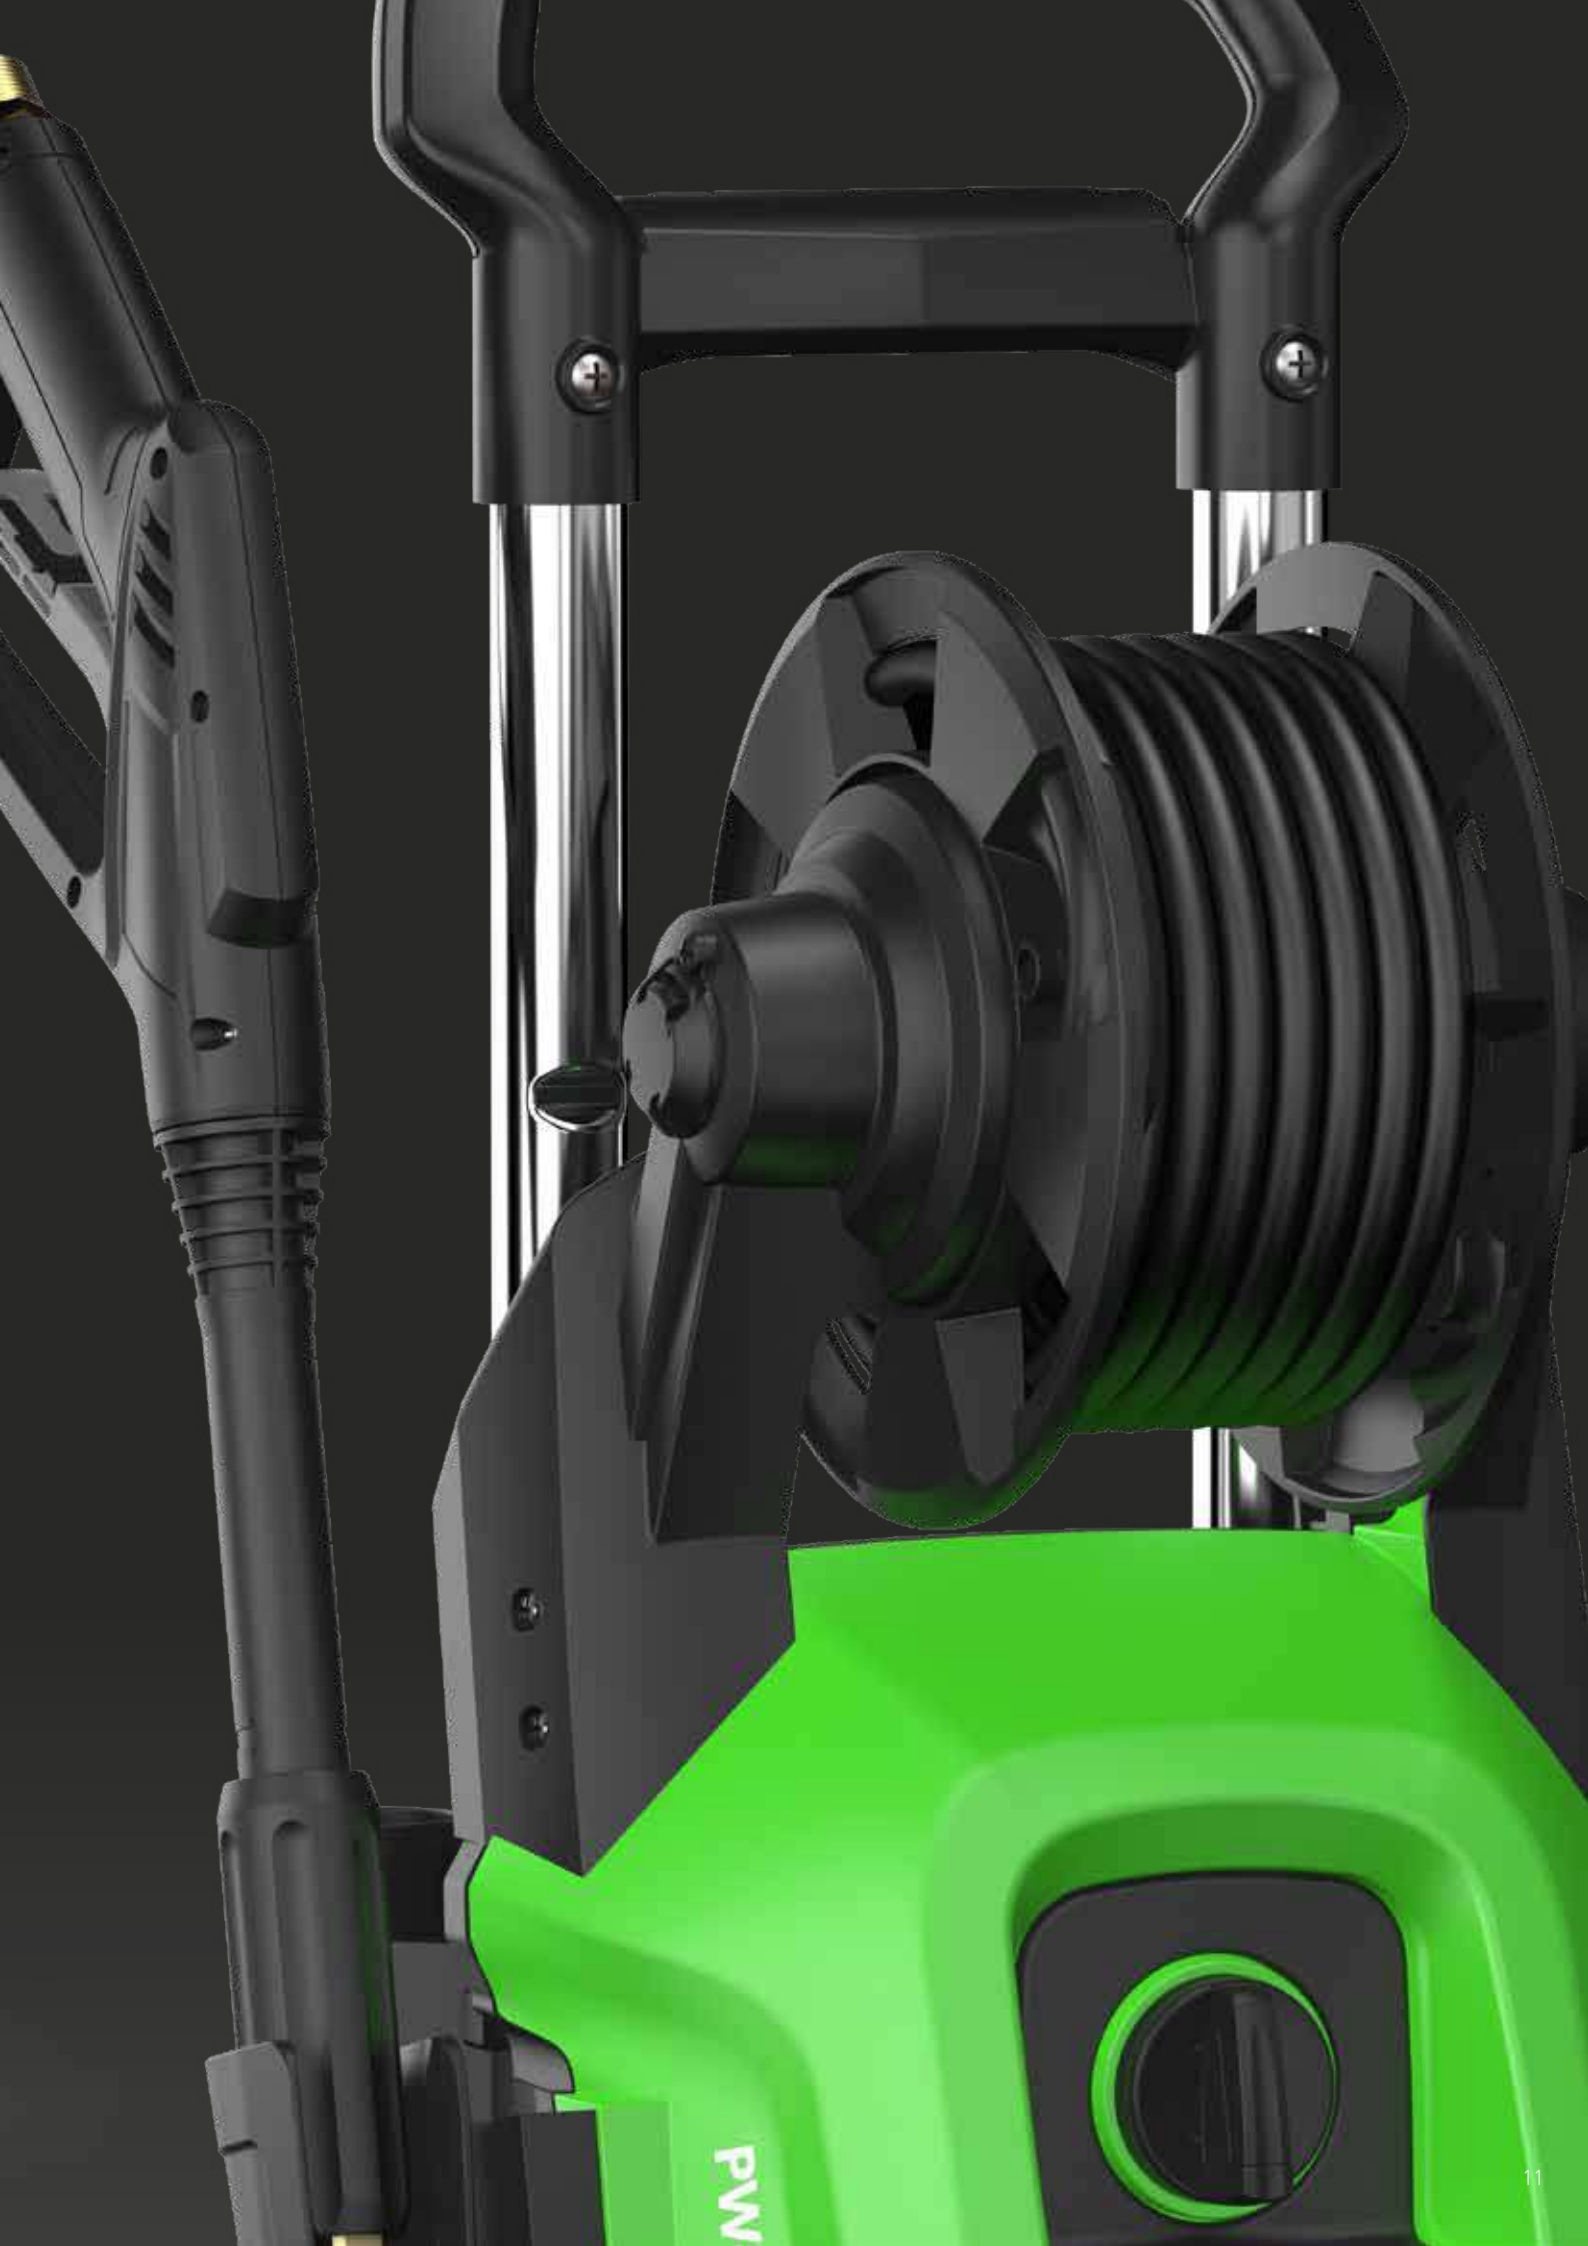

ALWAYS
READY



7 DAYS



TECHNICAL SPECIFICATIONS

PW-C32



Pressure
up to 130 bar



Flow rate
up to 420 l/h



Axial pump
Aluminium head



Compact
size



		PW-C32 I 1207 A	PW-C32 I 1307 A
Code		IDAF94423	IDAF94425
EAN 13 Bar code		8013378484091	8013378484107
Performance			
Operating pressure	bar/Mpa	120/12	130/13
Flow rate	l/h	400	420
Max inlet water temperature	°C	50	50
Power supply	Ph-V-Hz	1-230/50	1-230/50
Absorbed power	kW	1,8	2,1
Pump type / head material		Axial/Aluminium	Axial/Aluminium
Automatic Total Stop System		•	•
Detergent tank	l	1,2	1,2
High Pressure Hose	m	8	8
Dimension (LxWxH)	cm	38,7x32,1x91	38,7x32,1x91
Weight	Kg	20	20

TECHNICAL SPECIFICATIONS

PW-C33



Pressure
up to 160 bar



Flow rate
up to 540 l/h



Axial pump
Aluminium/brass
head



Compact
size



		PW-C33 I 1508 A	PW-C33 I 1508 AO	PW-C33 I 1609 AO
Code		IDAF94427	IDAF94461	IDAF94429
EAN 13 Bar code		8013378484121	8013378486347	8013378484480
Performance				
Operating pressure	bar/Mpa	150/15	150/15	160/16
Flow rate	l/h	500	500	540
Max inlet water temperature	°C	50	50	50
Power supply	Ph-V-Hz	1-230/50	1-230/50	1-230/50
Absorbed power	kW	2,5	2,5	3,2
Pump type / head material		Axial/Aluminium	Axial/Brass	Axial/Brass
Automatic Total Stop System		•	•	•
Detergent tank	l	1,2	1,2	1,2
High Pressure Hose	m	10	10	10
Dimension (LxWxH)	cm	43,9x39x95	43,9x39x95	43,9x39x95
Weight	Kg	25	25	26



IP Cleaning Srl
Viale Treviso, 63
30026 Summaga di Portogruaro (VE) - Italy
Tel. +39 0421 205511 - Fax +39 0421 204227
info@ipcworldwide.com - www.ipcworldwide.com

